

PX 4

pH / mv (pH) / mV (ORP) / °C




Sensor 

Main features

- pH range: -2...16 pH, resolution 0.01 pH
- 1...3 calibration points, 5 buffers USA memorized
- mV function for pH electrode quality test
- ORP range: -1000...+1900 mV
- ORP calibration on 1 point defined by the user

	PX 4
pH measuring range	-2...16
Resolution	0,01
Accuracy	± 0,01
Calibration points	1...3
Buffers auto recognition	5 buffers USA
Indication of calibration points	Yes
Stability indication	Yes
Electrode status alarm	Yes
mV (pH) measuring range	-1000 mV ... +1900 mV
Resolution	0,1 mV / 1 mV (automatic scale)
mV (ORP) measuring range	-1000 mV ... +1900 mV
Resolution	0,1 mV / 1 mV (automatic scale)
Calibration points	1 defined by the user
Temperature measuring range	0...60 °C
Resolution / Accuracy	0,1 °C / ± 0,2 °C
Unit	°C / °F
Auto off	After 8 minutes
Display	3 colors backlight LCD
IP protection	IP 67
Power supply	2 x 1,5V batteries AAA
Battery life	> 200 hours
Warranty - electronic parts	1 year
Warranty - sensor	6 months
Dimensions (Ø x L) mm	40 x 200
Weight	110 g

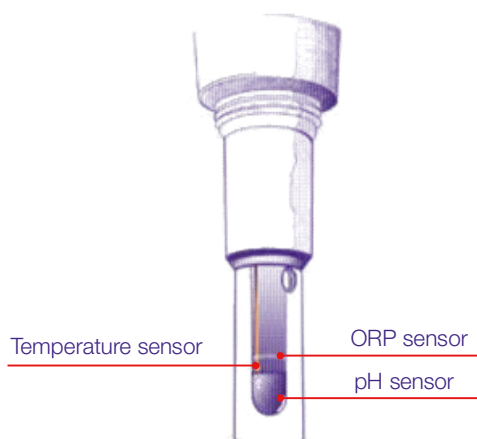

PX 4 kit

How to order

50014143	PX 4 tester KIT , includes: meter, 1 x 25 ml pH 7 and pH 4 buffer solution, 475 mV ORP buffer solution, electrode storage solution, string for neck, tissue, 2 x 1,5V AAA batteries, cardboard case.
50014463	Replacement sensor for PX 4